

# Modicon TM3 expansion modules

Catalogue  
2014



# How can you fit a 6000-page catalog in your pocket?

Schneider Electric provides you with the complete set of industrial automation catalogs all on a handy USB key for PC or in an application for tablets



## Digi-Cat, a handy USB key for PC



- > Convenient to carry
- > Always up-to-date
- > Environmentally friendly
- > Easy-to-share format

The screenshot shows the 'Library : Catalogs-EN' window. On the left is a vertical sidebar with icons for search, refresh, and navigation, labeled 'Library v1.0'. The main area is titled 'Catalogs EN' and contains a tree view of product categories. The 'Boxes, Cabling & Interfaces' category is expanded, showing sub-categories like 'Control Stations', 'Harmony XALD...', 'Modicon ABE7', etc. Other collapsed categories include 'Pushbuttons, Switches, Pilot Lights & Joysticks', 'Signaling Units', 'HMI (Terminals and Industrial PC)', 'Sensors & RFID System', 'Motor Protection Relays', 'Motor Starters', 'Drives & Soft Starters', 'Motion', 'Interface, Measurement & Control Relays', 'PAC, PLC & other Controllers', and 'Industrial Communication'.

Contact your local representative to get your own Digi-Cat



## e-Library, the app for tablets

If you have an iPad®:

- > Go to the App Store and search for e-Library
- > or scan the QR code



If you have an Android tablet:

- > Go to the Google Play Store™ and search for eLibrary
- > or scan the QR code



The screenshot shows the e-Library app on an Android device. At the top, there's a promotional banner for Schneider Electric products. Below it is a navigation bar with icons for search, refresh, and menu. The main content area is a catalog structure. On the left is a vertical sidebar with icons for search, refresh, and navigation, labeled 'e-Library'. The main area contains a tree view of product categories. The 'Pushbuttons, Switches, Pilot Lights, Control stations & Joysticks' category is expanded, showing sub-categories like 'HMI (Terminals and industrial PC)', 'Industrial communication', 'Interface, Measurement & Control Relays', 'Motion & Drives', 'Motor Starters', 'PAC, PLC & other Controllers', 'Power supplies & transformers', and 'Pushbuttons, Switches, Pilot Lights, Control stations & Joysticks'. To the right of the tree view, there are detailed lists of products under each category, such as 'Harmony XALD...' for control stations and 'Harmony 9001 K' for pushbuttons.

# General contents

## Modicon TM3 expansion modules

- Range presentation ..... page 2
- Modicon TM3 bus expansion system ..... page 3

### ■ Modicon TM3 digital I/O modules

- Selection guide* ..... **page 4**

- Presentation ..... page 5
- References ..... page 6

### ■ Modicon TM3 analog I/O modules

- Selection guide* ..... **page 8**

- Presentation ..... page 10
- References ..... page 11

### ■ Modicon TM3 expert module for control TeSys motor starters

- Presentation ..... page 12
- References ..... page 13

### ■ Modicon TM3 functional safety modules

- Selection guide* ..... **page 14**

- Presentation ..... page 16
- References ..... page 17

### ■ Modicon TM3 bus expansion modules

- Presentation ..... page 18
- References ..... page 19

# Expansion modules

## Modicon TM3 expansion modules

### Presentation of the range

#### Compatibility of offers

##### Modicon TM3 expansion modules

- > Modicon M221 logic controllers
- > Modicon M221 Book logic controllers
- > Modicon M241 logic controllers
- > Modicon M251 logic controllers
- > SoMachine Basic software
- > SoMachine software
- > Modicon TM2 expansion modules



Digital I/O modules



Analog I/O modules



Expert I/O modules



Functional Safety modules ▲



Bus expansion modules

#### Presentation

The Modicon TM3 expansion module offer provides an opportunity to enhance the capabilities of Modicon M221, M241 and M251 logic controllers:

- Digital I/O modules which can be used to create configurations with up to 264 digital I/O (according to the controller). These modules are available with the same connections as the controllers.
- Analog I/O modules which can be used to create configurations with up to 114 analog I/O (according to the controller) and are designed to receive, amongst other things, position, temperature or speed sensor signals. They are also capable of controlling variable speed drives or any device equipped with a current or voltage input.
- Expert modules for control of TeSys motor starters which simplify wiring up the control section due to connection with RJ45 cables.
- Functional Safety modules which simplify wiring and can be configured in the SoMachine Basic software.

In addition, the TM3 expansion system is flexible due to the possibility of remotely locating some of the TM3 modules in the enclosure or another cabinet (up to 5 meters (16.404 ft.) away, using a bus expansion system).

The Modicon TM3 expansion system is common to the whole range of Modicon M221, M241 and M251 logic controllers, meaning that the model of controller can be revised without changing expansion module.

#### Modicon TM3 range

See page

<b>Digital I/O modules</b>	<input type="checkbox"/> modules with 8 to 32 inputs/outputs: - 24 V or 120 V ... 50/60 Hz inputs - relay or transistor outputs	6
<b>Analog I/O modules</b>	<input type="checkbox"/> modules with 2 to 8 inputs/outputs: - current/voltage or temperature inputs - current/voltage outputs	10
<b>Expert module</b>	<input type="checkbox"/> module for control of one to four TeSys motor starters	14
<b>Functional Safety modules ▲</b>	<input type="checkbox"/> modules designed using <b>Preventa</b> technology for integral machine safety: - control of emergency stops - control of switches - control of light curtains - control of pressure-sensitive mats or edges	16
<b>Bus expansion system</b>	<input type="checkbox"/> transmitter module <input type="checkbox"/> receiver module <input type="checkbox"/> bus expansion cable	18

#### Specific features

Modicon TM3 expansion modules have been designed with a simple interlocking assembly mechanism. A bus expansion connector is used to distribute data and the power supply when assembling the Modicon TM3 expansion modules with logic controllers.

#### Connections

A wide choice of connections is available depending on the model of Modicon TM3 module:

- removable screw terminal blocks (1)
- removable spring terminal blocks (1)
- HE 10 connector, to be used with HE 10 cables/bare wires or HE 10/HE 10 and Telefast sub-bases (2)

The connectors (screw terminal blocks, spring terminal blocks, HE 10 connector, RJ 45) are located on the front of the TM3 expansion modules and are therefore accessible.

(1) The terminal blocks are supplied with Modicon TM3 expansion modules.

(2) Telefast Modicon ABE7 pre-wired system to be ordered separately (see on our website [www.schneider-electric.com](http://www.schneider-electric.com)).

▲ Available 2nd half of 2014.

# Expansion modules

## Modicon TM3 expansion modules


### Bus expansion system

#### Presentation

##### Modicon TM3 bus expansion system

A PLC configuration consists of a controller with its embedded input and output channels, used in conjunction with local or remote expansion modules which are used to increase the number of channels and/or functions.

- Expansion modules are connected directly by simple interlocking with the controller (local I/O) or remotely (remote I/O) with a TM3 bus expansion cable, up to 5 meters (16.404 ft.) away.
- The bus expansion connector, located on the side of the controllers and on each side of the Modicon TM3 expansion modules, transmits and synchronizes data.

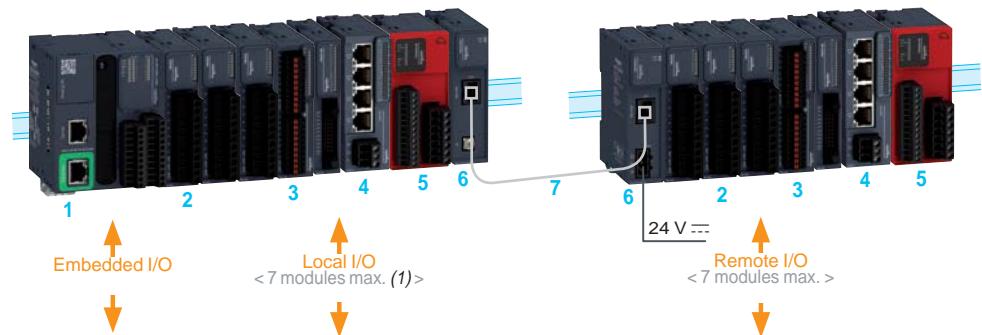

- 1 Logic controller (M221, M221 Book, M241, M251)
- 2 Modicon TM3 digital I/O modules.
- 3 Modicon TM3 analog I/O modules.
- 4 Modicon TM3 expert module: control of TeSys motor starters.
- 5 Modicon TM3 functional safety modules ▲.
- 6 Modicon TM3 bus expansion module (transmitter and receiver).
- 7 TM3 bus expansion cable.

#### ■ Local I/O

Maximum configuration: 7 Modicon TM3 expansion modules associated with an M2●● logic controller.

**With limited number of relay or transistor outputs (see page 6).**

#### ■ Remote I/O

Maximum configuration: 14 Modicon TM3 expansion modules (7 local modules + 7 remote modules) with the use of Modicon TM3 bus expansion system (transmitter and receiver modules).

The transmitter and receiver bus expansion modules can be used to:

- increase from 7 to 14 the number of I/O expansion modules that can be connected to an M2●● logic controller
- locate Modicon TM3 expansion modules remotely, up to 5 meters (16.404 ft.) away

The transmitter module and receiver module are physically linked by a **VDIP184546●●●** bus expansion cable.

#### Mounting

- Modicon TM3 expansion modules are mounted on a L symmetrical rail. They have a locking clip on the top of their casing.
- For plate or panel mounting, use the **TMAM2** kit.

(1) Depending on type of TM3 module used (see page 5).

▲ Available 2nd half of 2014.

Selection guide

## **Expansion modules**

Modicon TM3 digital I/O modules

Applications		Expansion module type		Digital Inputs	
		Compatibility		Modicon M221 and Modicon M221 Book logic controllers	
		■ Modicon M241 logic controllers		■ Modicon M241 logic controllers	
		■ Modicon M251 logic controllers		■ Modicon M251 logic controllers	
Inputs	Number and type of inputs	8 logic inputs	8 logic inputs	16 logic inputs	32 logic inputs
Rated voltage	24 V ...	24 V ~	120 V ~	24 V ...	24 V ...
Input type	Type 1 (IEC 61131-2, Edition 3)				
Input logic	sink/source	-	sink/source	sink/source	sink/source
Outputs	No. and type of outputs	-	-	-	-
Rated voltage					
Type of contact	-	-	-	-	
Logic	-	-	-	-	
Max. output current	□ Per output	-	-	-	
	□ Per group of channels	-	-	-	
Supply voltage	Format (w x h x d) mm (in.)	23.6 x 90 x 70 (0.93 x 3.54 x 2.76)	23.6 x 90 x 70 (0.93 x 3.54 x 2.76)	TM3D16, TM3D16G: 23.6 x 90 x 70 (0.93 x 3.54 x 2.76)	TM3D16, TM3D16G: 30.2 x 90 x 70 (1.19 x 3.54 x 2.76)
Mounting	Mounting on L-shaped symmetrical rail or panel with specific mounting kit TMAM2				
Module type	Channels connected:	TM3D18	TM3D18A	-	-
	with removable screw terminal blocks with a thread of 5.08 mm (0.2 in.)	-	-	TM3D16	-
	with removable screw terminal blocks with a thread of 3.81 mm (3.81 mm)	TM3D18G	-	-	-
	with removable spring terminal blocks with a thread of 5.08 mm (0.2 in.)	-	TM3D16G	-	-
	with removable spring terminal blocks with a thread of 3.81 mm (3.81 mm)	-	-	TM3D16K	-
	with HE 10 connectors (1)	-	-	TM3D132K	TM3D132K

Page 7

7



More technical information on [www.schneider-electric.com](http://www.schneider-electric.com)

[eider-electric.com](http://eider-electric.com)

### Presentation

The Modicon TM3 digital I/O module offer consists of 27 modules: input modules, output modules and mixed I/O modules.

These digital I/O modules complement the embedded I/O on M221, M221 Book, M241 and M251 logic controllers.

### Breakdown of the offer

#### Digital I/O modules

- with 8, 16 or 32 x 24 V  $\square$  inputs
- with 8 x 120 V  $\sim$  inputs
- with 8 or 16 relay outputs
- with 8, 16 or 32 source transistor 24 V  $\square$  outputs
- with 8, 16 or 32 sink transistor 24 V  $\square$  outputs
- with 4 x 24 V  $\square$  inputs and 4 relay outputs
- with 16 transistor 24 V  $\square$  inputs and 8 relay outputs

### Connections

Thanks to a wide choice of modules, it is possible to create homogenous configurations in terms of connections:

- Screw terminal blocks with a thread of 5.08 mm (0.2 in.) for ease of wiring: identical to the connectors on M221 and M241 logic controllers.
- Screw or spring-type connectors with a thread of 3.81 mm (0.15 in.) for compact dimensions: identical to the connectors on **TM221M16••** and **TM221ME16••** controllers.
- HE10 type connectors that can minimize wiring costs thanks to the Telefast pre-wired system: identical to the connectors on **TM221M32TK** and **TM221ME32TK** controllers.

### Configuration

- Local I/O (1): up to 7 I/O modules can be attached to the controller while complying with the restrictions indicated in the table below.
- Remote I/O (1) with TM3 bus expansion system: 7 additional I/O modules can be used without restriction. These modules are attached to a **TM3XREC1** receiver module.

Logic controllers	TM221								TM241/TM251	
	C16R CE16R	C16T CE16T	C24R CE24R	C24T CE24T	C40R CE40R	C40T CE40T	M16R ME16R M16RG ME16RG	M16T ME16T M16TG ME16TG	M32TK ME32TK	TM241•••• TM251••••
Maximum number of TM3 module transistor (local) outputs directly connected to the controller (2)	104	136	144	176	(3)					
Maximum number of TM3 module relay (local) outputs directly connected to the controller (2)	23	28	32	40	48	60	92	96	96	(3)

(1) Local I/O and remote I/O: see page 3.

(2) If using bus expansion system: maximum number of TM3 module relay or transistor outputs installed between the controller and the **TM3XTRA1** transmitter module (local outputs).


(3) Up to 7 TM3 modules regardless of the number of outputs used.

### Mounting

- Digital I/O modules are mounted on a L-shaped symmetrical rail.
- For plate or panel mounting, use the **TMAM2** kit.

### Description

#### Modicon TM3 digital I/O modules

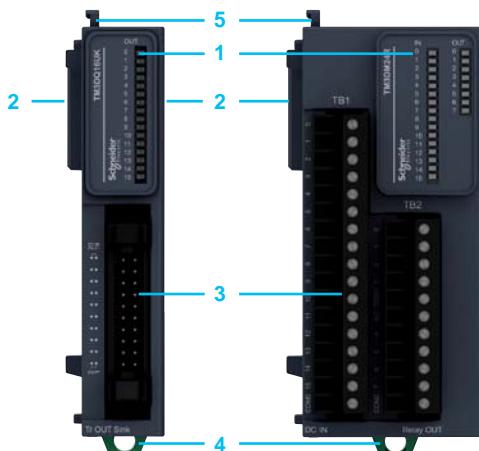

- 1 LED display block for the module channels and diagnostics
- 2 TM3 bus connectors (one on each side). These are designed to provide continuity of the link between connected modules.
- 3 Input or output channel terminal blocks (depending on model: screw terminal blocks, spring terminal blocks or HE 10 connector).
- 4 L-shaped symmetrical rail locking clip.
- 5 Adjacent module locking latch.

References					
Modicon TM3 digital input modules					
TM3DI8	TM3DI8G	Number of logic inputs	Input type	Term. block for input conn. (1) Thread (mm/in.)	References Weight kg lb
8 inputs		sink/source 24 V ---	screw 5.08/0.2	TM3DI8	0.110 0.243
			spring 5.08/0.2	TM3DI8G	0.095 0.209
		120 V ~	screw 5.08/0.2	TM3DI8A	0.110 0.243
TM3DI8A	TM3DI32K	16 inputs	sink/source 24 V ---	screw 3.81/0.15	TM3DI16 0.105 0.231
			spring 3.81/0.15	TM3DI16G	0.095 0.209
			HE 10 connector —	TM3DI16K (2)	0.075 0.165
TM3DQ16U	TM3DQ16UG	32 inputs	sink/source 24 V ---	HE 10 connector —	TM3DI32K (2)
Modicon TM3 digital output modules					
TM3DQ16UK		Number of logic outputs	Output type	Output current	Term. block for output conn. (1) Thread (mm/in.)
8 outputs		Relay	2 A	screw 5.08/0.2	TM3DQ8R 0.130 0.287
				spring 5.08/0.2	TM3DQ8RG 0.115 0.254
			Transistor, source	0.5 A	screw 5.08/0.2
					TM3DQ8T 0.110 0.243
					spring 5.08/0.2
			Transistor, sink	0.5 A	screw 5.08/0.2
					TM3DQ8U 0.110 0.243
					spring 5.08/0.2
		16 outputs	Relay	2 A	screw 3.81/0.15
					TM3DQ16RG 0.130 0.287
			Transistor, source	0.5 A	screw 3.81/0.15
					TM3DQ16T 0.105 0.231
					spring 3.81/0.15
				0.1 A	HE 10 connector —
					TM3DQ16TK (2) 0.165
			Transistor, sink	0.5 A	screw 3.81/0.15
					TM3DQ16U 0.105 0.231
					spring 3.81/0.15
				0.1 A	HE 10 connector —
					TM3DQ16UK (2) 0.165
TM3DQ32TK	TM3DQ32UK	32 outputs	Transistor, source	0.1 A	HE 10 connector —
					TM3DQ32TK 0.115 0.254
			Transistor, sink	0.1 A	HE 10 connector —
					TM3DQ32UK 0.115 0.254
Modicon TM3 digital mixed I/O modules					
TM3DM24R	TM3DM24RG	No. of logic I/O	Number and type of inputs	Number and type of outputs	Term. block for output conn. (1) Thread (mm/in.)
8 inputs/outputs		4 sink/source 24 V --- inputs	4 relay outputs 2 A	screw 5.08/0.2	TM3DM8R 0.120 0.265
				spring 5.08/0.2	TM3DM8RG 0.100 0.220
24 inputs/outputs		16 sink/source 24 V --- inputs	8 relay outputs 2 A	screw 3.81/0.15	TM3DM24R 0.165 0.364
				spring 3.81/0.15	TM3DM24RG 0.155 0.342
Separate parts					
Mounting kit <i>Sold in lots of 10</i>		Designation	Description	Reference	Weight kg lb
			For plate or panel mounting of digital I/O modules	TMAM2	0.065 0.143
Set of terminal blocks for connecting the I/O			4 x 10-way and 4 x 11-way removable terminal blocks with screw terminals for TM3DI16, TM3DQ16R, TM3DQ16T and TM3DQ16U modules	TMAT2MSET	0.127 0.280
			4 x 10-way and 4 x 11-way removable terminal blocks with spring terminals for TM3DI16G, TM3DQ16RG, TM3DQ16TG and TM3DQ16UG modules	TMAT2MSETG	0.127 0.280

(1) Removable screw or spring-type terminal blocks, supplied.

(2) Modules compatible with the Telefast Modicon ABE7 pre-wired system (on our website [www.schneider-electric.com](http://www.schneider-electric.com)).

## Selection guide

### Expansion modules Modicon TM3 analog I/O modules

Applications	Type of expansion module	Analog inputs		Analog outputs		Analog inputs/outputs	
		Number	Type	Voltage/current	Temperature or voltage/current	Voltage/current	Temperature or voltage/current
<b>Analog inputs</b>							
Modicon M221 and M221 Book logic controllers	Range	2 inputs	4 inputs	8 inputs	8 inputs	2 inputs	2 inputs
Modicon M221 logic controllers	Resolution	16 bits or 15 bits + sign	12 bits or 11 bits + sign	16 bits or 15 bits + sign	16 bits or 15 bits + sign	16 bits or 11 bits + sign	16 bits or 11 bits + sign
Modicon M251 logic controllers	Read time	1 or 10 ms (configurable)	1 or 10 ms (configurable)	1 or 10 ms (configurable)	1 or 10 ms (configurable)	1 or 10 ms (configurable)	1 or 10 ms (configurable)
<b>Compatibility</b>							
Modicon M221 and M221 Book logic controllers	Number	—	—	—	—	—	—
Modicon M221 logic controllers	Type	—	—	—	—	—	—
Modicon M251 logic controllers	Range	—	—	—	—	—	—
<b>Inputs</b>							
Modicon M221 and M221 Book logic controllers	Number	2 inputs	4 inputs	8 inputs	8 inputs	2 inputs	2 inputs
Modicon M221 logic controllers	Type	Voltage/current	Voltage/current	Temperature or voltage/current	Temperature or voltage/current	Voltage/current	Voltage/current
Modicon M251 logic controllers	Range	-10...+10 VDC, 0...+10 VDC/ 0...20 mA, 4...20 mA	-10...+10 VDC, 0...+10 VDC/ 0...20 mA, 4...20 mA	Thermocouples (J, K, R, S, B, T, N, E, C) NTC and PTC thermistors	Thermocouples (J, K, R, S, B, T, N, E, C) Temperature probes (RTDs): (Ni100, Ni1000, Pt100, Pt1000)	—	—
Modicon M221 and M221 Book logic controllers	Resolution	16 bits or 15 bits + sign	12 bits or 11 bits + sign	16 bits or 15 bits + sign	16 bits or 15 bits + sign	16 bits or 11 bits + sign	16 bits or 11 bits + sign
Modicon M221 logic controllers	Read time	1 or 10 ms (configurable)	1 or 10 ms (configurable)	1 or 10 ms (configurable)	1 or 10 ms (configurable)	1 or 10 ms (configurable)	1 or 10 ms (configurable)
Modicon M251 logic controllers	Number	—	—	—	—	—	—
Modicon M221 and M221 Book logic controllers	Type	—	—	—	—	—	—
Modicon M221 logic controllers	Range	—	—	—	—	—	—
Modicon M251 logic controllers	Transfer time	—	—	—	—	—	—
<b>Outputs</b>							
Modicon M221 and M221 Book logic controllers	Number	2 outputs	4 outputs	2 outputs	2 outputs	2 outputs	2 outputs
Modicon M221 logic controllers	Type	Voltage/current	Voltage/current	Voltage/current	Voltage/current	Voltage/current	Voltage/current
Modicon M251 logic controllers	Range	-10...+10 VDC, 0...+10 VDC/ 0...20 mA, 4...20 mA	-10...+10 VDC, 0...+10 VDC/ 0...20 mA, 4...20 mA	-10...+10 VDC, 0...+10 VDC/ 0...20 mA, 4...20 mA	-10...+10 VDC, 0...+10 VDC/ 0...20 mA, 4...20 mA	-10...+10 VDC, 0...+10 VDC/ 0...20 mA, 4...20 mA	-10...+10 VDC, 0...+10 VDC/ 0...20 mA, 4...20 mA
Modicon M221 and M221 Book logic controllers	Resolution	—	—	—	—	—	—
Modicon M221 logic controllers	Transfer time	—	—	—	—	—	—
Modicon M251 logic controllers	Number	—	—	—	—	—	—
Modicon M221 and M221 Book logic controllers	Type	—	—	—	—	—	—
Modicon M221 logic controllers	Range	—	—	—	—	—	—
Modicon M251 logic controllers	Transfer time	—	—	—	—	—	—
<b>Supply voltage</b>							
Modicon M221 and M221 Book logic controllers	Format (w x h x d) mm (in)	23.6 x 90 x 70 (0.93 x 3.54 x 2.76)	Mounting on L-shaped rail or panel with specific mounting kit TMAM2	With a 24 V... external power supply	With a 24 V... external power supply	With a 24 V... external power supply	With a 24 V... external power supply
Modicon M221 logic controllers	Number	—	—	—	—	—	—
Modicon M221 logic controllers	Type	—	—	—	—	—	—
Modicon M251 logic controllers	Number	—	—	—	—	—	—
Modicon M251 logic controllers	Type	—	—	—	—	—	—
<b>Mounting</b>							
Modicon M221 and M221 Book logic controllers	Channel connection:	via removable screw terminal blocks at intervals of 5.05 (0.2 in.)		TM3AQ4		TM3TM3	—
Modicon M221 logic controllers	Type of module	TM3A12H	—	TM3AQ2	—	TM3AQ4	—
Modicon M251 logic controllers	Number	—	—	TM3AQ2	—	TM3AQ4	—
Modicon M251 logic controllers	Type	TM3A12T	—	TM3AQ2	—	TM3AQ4	—
Modicon M221 and M221 Book logic controllers	Range	TM3A14	TM3T14	TM3AQ2G	TM3AQ4G	TM3TM3G	TM3AM6
Modicon M221 and M221 Book logic controllers	Resolution	TM3A12HG	—	TM3T18TG	—	TM3T18TG	TM3AM6G
Modicon M221 logic controllers	Number	TM3A14G	TM3T14G	TM3A18G	—	TM3A18G	—
Modicon M221 logic controllers	Type	TM3A14G	TM3T14G	TM3A18G	—	TM3A18G	—
Modicon M251 logic controllers	Number	—	—	—	—	—	—
Modicon M251 logic controllers	Type	—	—	—	—	—	—

More technical information on [www.schneider-electric.com](http://www.schneider-electric.com)



### Presentation

The Modicon TM3 analog I/O module offer consists of 18 input, output and mixed input/output modules. The input modules acquire various analog values encountered in industrial applications.

These I/O modules complement the embedded I/O in Modicon M221, M221 Book and M241 logic controllers.

- TM3AI $\bullet\bullet$  and TM3TI $\bullet\bullet$  analog input modules are used to acquire various analog values (voltage, current or temperature) encountered in industrial applications.
- TM3AQ $\bullet\bullet$  analog output modules are used to control preactuators in physical units, such as variable speed drives or valves and applications where process control is required.
- TM3TM $\bullet\bullet$  and TM3AM $\bullet\bullet$  mixed modules combine voltage/current or temperature analog inputs as well as one or two voltage/current outputs in the same case.
- When the controller stops, the outputs of each TM3 analog modules can be configured to fall back (hold the last value or a specified value). This function, when set to "hold", is useful when debugging the application or when a fault occurs, in order not to disturb the process being controlled.

### Breakdown of the offer

#### Analog I/O modules

Modules with 2 to 8 analog I/O:

- voltage/current or temperature inputs
- voltage/current outputs

### Format

A single format: 23.6 x 90 x 70 (0.93 x 3.54 x 2.76 in.).

### Connection

With a wide selection of modules, uniform configurations can be created in terms of connectors:

- Screw-type or spring-type connectors at intervals of 5.08 (0.2 in.) for ease of wiring: identical to the connectors on Modicon M221 (TM221C $\bullet\bullet\bullet\bullet$ ) and Modicon M241 (TM241C $\bullet\bullet\bullet\bullet$ ) logic controllers.
- Screw-type or spring-type connectors at intervals of 3.81 (0.15 in.) for compact dimensions: identical to the connectors on Modicon M221 Book (TM221M16 $\bullet\bullet$  and TM221ME16 $\bullet\bullet$ ) logic controllers.

### Configuration

- Analog I/O modules connect to Modicon M221 and M221 Book, M241 and M251 logic controllers according to the general rules for the Modicon TM3 system: 7 modules max. and 14 modules max. with use of Modicon TM3 bus expansion system (transmitter and receiver).
- An external 24 V  $\equiv$  power supply is required for each Modicon TM3 analog module.
- The I/O modules are designed with isolation by an optocoupler between the internal electronics and the I/O channels.


### Mounting

- The analog modules are mounted on a L-shaped symmetrical rail.
- For plate or panel mounting, use the TMAM2 kit.
- The TM2XMTGB grounding plate simplifies connection of the analog sensor and actuator cable shielding (shielding to be connected to the device's functional ground).

### Description

#### Modicon TM3 analog modules

- 1 Locking latch for the adjacent module.
- 2 TM3 bus connectors (one on each side). These are designed to provide continuity of the link between connected modules.
- 3 Clip for locking on L-shaped symmetrical rail.
- 4 Module "Power on" LED.
- 5 Removable spring or screw terminal blocks (depending on the model) for connecting the analog channels and the 24 V power supply.

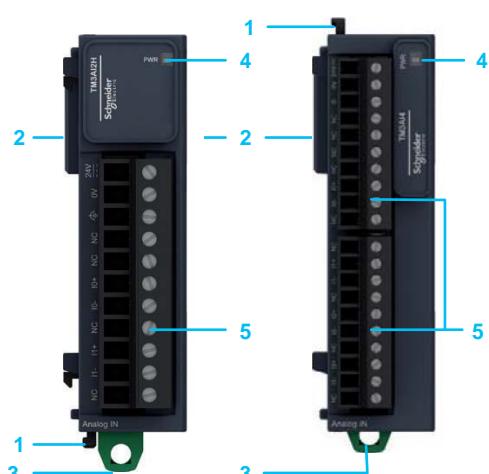

TM3AI4, TM3TI4, TM3AI8,  
TM3TI8T, TM3AM6

TM3AI2H, TM3AQ2,  
TM3AQ4, TM3TM3



### References

#### Modicon TM3 analog I/O modules

Number and type of channels	Input range	Output range	Resolution	Conn. block for the inputs (1) Pitch (in.)	Reference	Weight kg lb
<b>2 voltage/current inputs</b>	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	-	16 bits or 15 bits + sign	Screw 5.08/0.2	<b>TM3AI2H</b>	0.115 0.254
				Spring 5.08/0.2	<b>TM3AI2HG</b>	0.100 0.220
<b>4 voltage/current inputs</b>	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	-	12 bits or 11 bits + sign	Screw 3.81/0.15	<b>TM3AI4</b>	0.110 0.243
				Spring 3.81/0.15	<b>TM3AI4G</b>	0.100 0.220
<b>4 voltage/current or temperature inputs (2)</b>	<input type="checkbox"/> Thermocouples (J, K, R, S, B, T, N, E, C) <input type="checkbox"/> Temperature probes (RTDs) (Ni100, Ni1000, PT100, PT1000) <input type="checkbox"/> - 10...+ 10 VDC, 0...+ 10 VDC/ /0...20 mA, 4...20 mA	-	16 bits or 15 bits + sign	Screw 3.81/0.15	<b>TM3TI4</b>	0.110 0.243
				Spring 3.81/0.15	<b>TM3TI4G</b>	0.100 0.220
<b>8 voltage/current inputs</b>	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	-	12 bits or 11 bits + sign	Screw 3.81/0.15	<b>TM3AI8</b>	0.110 0.243
				Spring 3.81/0.15	<b>TM3AI8G</b>	0.100 0.220
<b>8 temperature inputs</b>	<input type="checkbox"/> Thermocouples (J, K, R, S, B, T, N, E, C) <input type="checkbox"/> NTC and PTC thermistors	-	16 bits or 15 bits + sign	Screw 3.81/0.15	<b>TM3TI8T</b>	0.110 0.243
				Spring 3.81/0.15	<b>TM3TI8TG</b>	0.100 0.220

#### Modicon TM3 analog output modules

<b>2 voltage/current outputs</b>	-	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	12 bits or 11 bits + sign	Screw 5.08/0.2	<b>TM3AQ2</b>	0.115 0.254
<b>4 voltage/current outputs</b>	-	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	12 bits or 11 bits + sign	Screw 5.08/0.2	<b>TM3AQ4</b>	0.115 0.254
				Spring 5.08/0.2	<b>TM3AQ4G</b>	0.100 0.220

#### Modicon TM3 analog mixed I/O modules

<b>2 temperature or voltage/current inputs (2) and 1 voltage/current output</b>	<input type="checkbox"/> Thermocouples (J, K, R, S, B, T, N, E, C) <input type="checkbox"/> Temperature probes (RTDs) (Ni100, Ni1000, PT100, PT1000) <input type="checkbox"/> - 10...+ 10 VDC, 0...+ 10 VDC/ /0...20 mA, 4...20 mA	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	16 bits or 15 bits + sign (for I)	Screw 5.08/0.2	<b>TM3TM3</b>	0.115 0.254
			12 bits or 11 bits + sign (for O)	Spring 5.08/0.2	<b>TM3TM3G</b>	0.100 0.220
<b>4 voltage/current inputs and 2 voltage/current outputs</b>	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	- 10...+ 10 VDC, 0...+ 10 VDC/ 0...20 mA, 4...20 mA	12 bits or 11 bits + sign (for I and O)	Screw 3.81/0.15	<b>TM3AM6</b>	0.110 0.243
				Spring 3.81/0.15	<b>TM3AM6G</b>	0.100 0.220

#### Separate parts


Description	Details	Unit reference	Weight kg lb
<b>Grounding plate</b>	Support equipped with 10 male Faston connectors for connecting the cable shielding (via 6.35 connectors, not supplied) and the functional grounds (FE)	<b>TM2XMTGB</b>	0.045 0.099
<b>Shielding connection clamps</b> <i>Sold in lots of 25</i>	Assembly and earthing of the cable shielding. Pack of 25 clamps including 20 for Ø 4.8 (0.189 in.) cable and 5 for Ø 7.9 (0.311 in.) cable	<b>TM200RSRCEMC</b>	-
<b>Mounting kit</b> <i>Sold in lots of 10</i>	For mounting the analog I/O modules on a plate or panel	<b>TMAM2</b>	0.065 0.143
<b>Set of I/O terminal blocks</b>	4 terminal blocks with 10 pins and 4 terminal blocks with 11 removable screw terminal pins for TM3AI4, TM3TI4, TM3AI8, TM3TI8, TM3AM6 modules	<b>TMAT2MSET</b>	0.127 0.280
	4 terminal blocks with 10 pins and 4 terminal blocks with 11 removable spring terminal pins for TM3AI4G, TM3TI4G, TM3AI8G, TM3TI8G, TM3AM6G modules	<b>TMAT2MSETG</b>	0.127 0.280

(1) Removable screw terminal blocks supplied with each module.

(2) Each input can be configured independently for temperature or voltage/current.

# Expansion modules

## Modicon TM3 expert module for TeSys motor starter applications

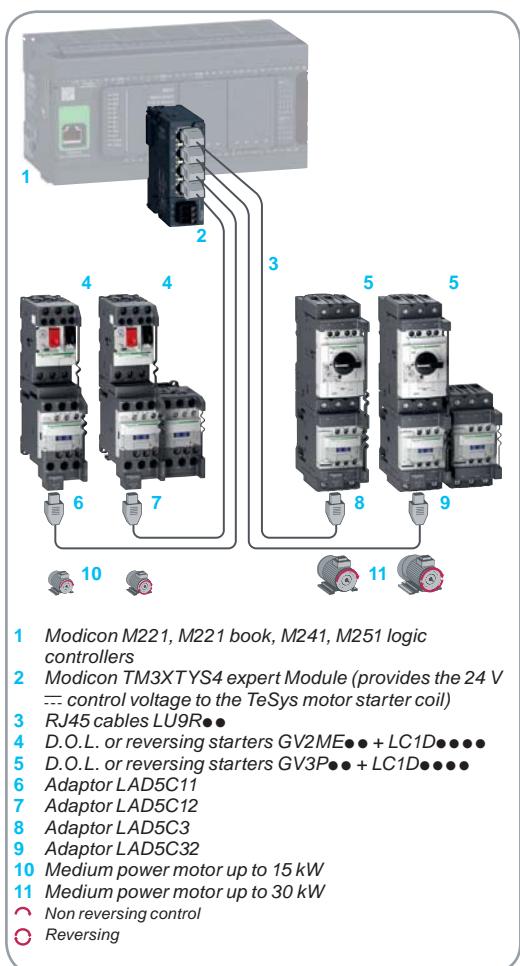

### Presentation

The **TM3XTYS4** expert module is a pre-wired interface for use with Modicon M221, M241 and M251 logic controllers, designed to monitor and control up to four motor starters.

The **TM3XTYS4** expert module is a component of TeSys Solink system that allows a simple, fast and error free wiring of the motor starter.

### Controlling motor starters with the TM3XTYS4 expert module

Each of the four channels on the **TM3XTYS4** expert module has:

- Two outputs for the command of the motor starter:
- direction 1 command
- direction 2 command, if reversing starter.
- Three inputs for the motor starter status:
- Ready
- Run
- Fault

The inputs are connected in series with the motor starter auxiliary contacts.

### Connections

- The **TM3XTYS4** Expert module is equipped with four RJ 45 connectors for connection to the motor starters.
- **LU9R●●** type cordsets are dedicated to the connection of TeSys motor starter and equipped with an RJ 45 connector at each end.

### Configuration

- The expert module is connected directly to the logic controllers on the TM3 bus connector or to the bus expansion system (receiver module).
- One or more expert modules can be connected to M221, M221 Book, M241 and M251 logic controllers according to the general rules for the TM3 system:  
7 modules max. and 14 modules max. with the use of Modicon TM3 bus expansion system (transmitter and receiver).

### Mounting

- The **TM3XTYS4** expert module is mounted on a  $\text{L}_{\text{T}}$  symmetrical rail.
- For plate or panel mounting, use the **TMAM2** kit.


### Format

A single format: 23.6 x 90 x 70 mm (0.93 x 3.54 x 2.76 in.).

### TeSys motor starter applications examples

	Direct Up to 15 kW / 400 V	Reversing From 18.5 to 30 kW / 400 V	Up to 15 kW / 400 V	From 18.5 to 30 kW / 400 V
<b>TeSys D</b>				
1 Motor circuit breaker	GV2ME●● or GV2P●●	GV3P●●	GV2ME●● or GV2P●●	GV3P●●
2 Contactor 24 V ...	LC1D09BL to LC1D32BL LC1D09BD to LC1D32BD	LC1D40ABD to LC1D65ABD	LC2D09BL to LC2D32BL LC2D09BD to LC2D32BD	LC2D40BD to LC1D65BD
3 Combination block	GV2AF3	—	GV2AF3	—
4 Auxilliary contact	GVAE20	GVAE20	GVAE20	GVAE20
5 Connection module	LAD5C11	LAD5C31	LAD5C12	LAD5C32
<b>Connection cable</b>				
6 Length of 0.3 m	LU9R03			
6 Length of 1 m	LU9R10			
6 Length of 3 m	LU9R30			
<b>Modicon TM3 module</b>				
7 Modicon TM3	TM3XTYS4			
<b>TeSys U</b>				
8 Power base	LUB120 or LUB320		LUB120 or LUB320	
9 Control unit 24 V ...	LUCA/LUCB/LUCC/LUCD●●BL		LUCA/LUCB/LUCC/LUCD●●BL	
10 Terminal blocks	LU9BN11C		LU9MRC	
11 Parallel wiring module	LUFC00		LUFC00	

For further information about **TeSys motor starter applications**, please consult our website [www.schneider-electric.com](http://www.schneider-electric.com).

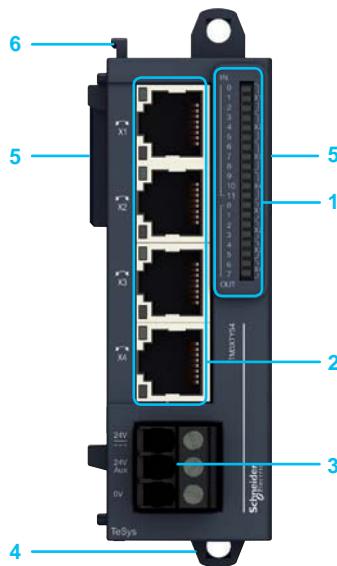

TM3XTYS4

### Description

#### TM3XTYS4 expert module

- 1 Block with 20 LEDs displaying the status of the 12 input channels and 8 output channels.
- 2 Four RJ 45 connectors for cordsets connecting to the motor starters.
- 3 Screw terminal block for connecting the 24 V  $\text{---}$  power supply for the inputs and starter coils.
- 4  $\text{L}-\text{r}$  symmetrical rail locking clip.
- 5 TM3 bus connectors (one on each side). These are designed to provide continuity of the link between connected modules.
- 6 Adjacent module locking latch.

### References

#### Expert module (1)

Designation	Number and type of channels	Reference	Weight kg lb
Expert modules for control of TeSys motor starters 24 V $\text{---}$ power supply (1.2 A)	4 motor starters	TM3XTYS4	0.115 0.254

#### Separate parts

Designation	Description	Reference	Weight kg lb
Mounting kit <i>Sold in lots of 10</i>	For plate or panel mounting of expert modules	TMAM2	0.065 0.143

(1) The TM3XTYS4 module is supplied with a screw removable terminal block for connecting the power supply.

## Selection guide

**Expansion modules**  
Modicon TM3 functional safety modules  
(Powered by **Preventia** technology)

Safety application	Control of Emergency stop and switches	Control of Emergency stop, switches or solid-state output safety light curtains
<b>Compatibility</b>	<b>Modicon M221 and Modicon M221 Book logic controllers</b> <b>Modicon M221 logic controllers</b> <b>Modicon M221 logic controllers</b>	<b>Modicon M221 logic controllers</b> <b>Modicon M221 logic controllers</b> <b>Modicon M221 logic controllers</b>
<b>Maximum achievable safety level</b>	PLeCategory 3 conforming to EN/ISO 13849-1 SIL3 conforming to EN/IEC 61508 and EN/IEC 62061	PLeCategory 4 conforming to EN/IEC 61508 and EN/IEC 62061
<b>Standards (product)</b>	EN/IEC 60947-1 EN/IEC 60947-5-1	EN/IEC 60947-1 EN/IEC 60947-5-1
<b>Standards (machine assembly)</b>	EN/IEC 60204-1 EN/ISO 13850 EN/ISO 14119	EN/IEC 60204-1 EN/ISO 13850 EN/ISO 14119
<b>Switches in protective devices</b>	–	Also designed for use with equipment conforming to EN/IEC 61496-1 up to type 4
<b>Type 4 light curtains equipped with solid-state safety outputs with test function</b>	–	Also designed for use with equipment conforming to EN/IEC 61496-1 up to type 4
<b>4-wire pressure-sensitive mats or edges</b>	–	–
<b>Product certifications</b>	UL, CSA, TÜV, CCC	UL, CSA, TÜV, CCC

<b>Safety circuits</b>	<b>Number</b>	<b>3 NO</b>
<b>Type</b>	<b>Instantaneous opening relay</b>	<b>Instantaneous opening relay</b>
<b>Module fuse protection</b>	<b>Internal, electronic</b>	<b>Internal, electronic</b>
<b>LEDs</b>	<b>6 LEDs</b>	<b>6 LEDs</b>
<b>Power supply</b>	<b>24 V...:</b>	<b>24 V...:</b>
<b>Synchronization time between inputs</b>	<b>Unlimited</b>	<b>Unlimited or 2 s, 4 s (depending on wiring), can be configured in the software</b>
<b>Input channel voltage</b>	<b>24 V...:</b>	<b>24 V...:</b>

<b>Channels and power supply connected:</b>	<b>TM3SAF15R ▲</b>	<b>TM3SAK6R ▲</b>
<b>Safety module type</b>	<b>TM3SAC5RG ▲</b>	<b>TM3SAF15RG ▲</b>

▲ Available 2nd half of 2014.

17

▲ Available 2nd half of 2014.

# Expansion modules

Modicon TM3 functional safety modules  
(Powered by **Preventa** technology)



## Presentation

Modicon TM3 functional safety modules ▲ are designed using Preventa technology. They can be used to incorporate machine safety into the overall machine control.

### Data acquisition: control of safety products

- Emergency stop button: complementary protection measures
- Monitoring devices used in protective systems to control access to hazardous areas
- Light curtains and safety mats to detect intrusion into hazardous areas


### Monitoring and processing

- Modicon TM3 functional safety modules control the input signals from monitoring devices and act as an interface with contactors and variable speed drives, causing the machine to stop.
- Modicon TM3 functional safety modules complement the embedded I/O on M221, M221 Book, M241 and M251 logic controllers.

Modicon TM3 functional safety modules	Safety system/Performance level reached
---------------------------------------	---


#### For control of emergency stops

Category 3/PLd, SIL2 architecture

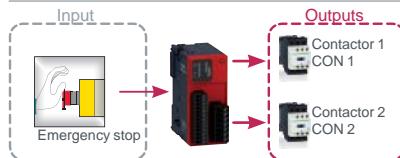


#### For control of switches

Category 4/PLe, SIL3 architecture

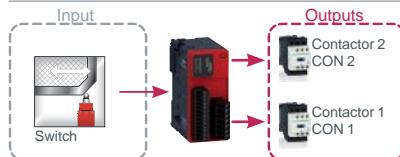


#### For control of type 4 light curtains

Category 3/PLd, SIL2 architecture

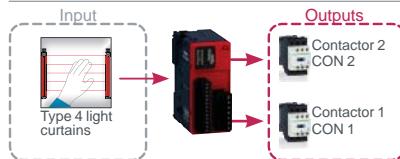

#### For control of pressure-sensitive mats or edges

Category 4/PLe, SIL3 architecture

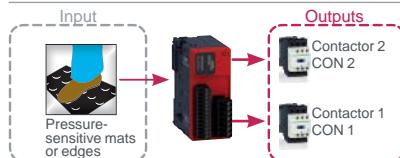

□ The safety outputs available on the 4 modules are relay type, guided by microprocessor technology.

□ Diagnostic utilities use LEDs, found on the module front face. They provide information on the monitoring circuit status.

□ The diagnostic information is shared via the TM3 bus.

□ The Start button monitoring function is configurable depending on the wiring.

## Connections

Equipped, depending on the model, with removable screw or spring-type terminals for connecting the safety channels.


## Configuration

Modicon TM3 functional safety modules connect to M221, M221 Book, M241 and M251 logic controllers according to the general rules for the TM3 system: 7 modules max. and 14 modules max. with the use of Modicon TM3 bus expansion system (transmitter and receiver).

## Mounting

- Modicon TM3 functional safety modules are mounted on a L-shaped symmetrical rail.
- For plate or panel mounting, use the **TMAM2** kit.

▲ Available 2nd half of 2014.

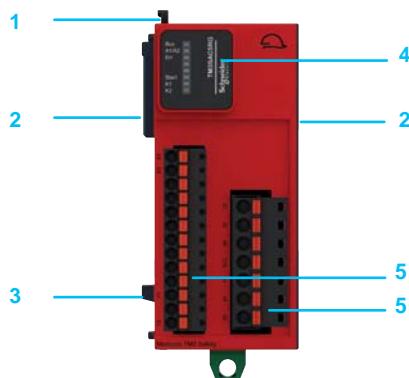

### Description

#### Modicon TM3 functional safety modules

- 1 Adjacent module locking latch.
- 2 TM3 bus connectors (one on each side). These are designed to provide continuity of the link between connected modules.
- 3 ↗ symmetrical rail locking clip.
- 4 Display block (6 LEDs - green, red) for the module channels and diagnostics.
- 5 Removable spring or screw-type terminal blocks (depending on the model) for connecting the safety channels and the power supply.



### References

Designation	Maximum achievable safety level	Term. block for input conn. (1)	Reference	Weight kg lb
<b>24 V --- power supply</b>				
Functional Safety modules for control of □ emergency stops □ switches	PLd/Category 3 conforming to EN/ISO 13849-1 SILCL2 conforming to EN/IEC 61508 and EN/IEC 62061	screw	<b>TM3SAC5R ▲</b>	0.190 0.420
		spring	<b>TM3SAC5RG ▲</b>	0.190 0.420
<b>Functional Safety modules for control of</b>				
□ emergency stops □ switches	PLe/Category 4 conforming to EN/ ISO 13849-1 SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	screw	<b>TM3SAF5R ▲</b>	0.190 0.420
		spring	<b>TM3SAF5RG ▲</b>	0.190 0.420
Functional Safety modules for control of □ emergency stops □ switches □ safety light curtains with solid-state outputs	PLd / Category 3 conforming to EN/ISO 13849-1 SILCL2 conforming to EN/ IEC 61508 and EN/IEC 62061	screw	<b>TM3SAFL5R ▲</b>	0.190 0.420
		spring	<b>TM3SAFL5RG ▲</b>	0.190 0.420
Functional Safety modules for control of □ emergency stops □ switches □ safety light curtains with solid-state outputs □ pressure-sensitive mats or edges	PLe/Category 4 conforming to EN/ISO 13849-1 SILCL3 conforming to EN/IEC 61508 and EN/IEC 62061	screw	<b>TM3SAK6R ▲</b>	0.190 0.420
		spring	<b>TM3SAK6RG ▲</b>	0.190 0.420
<b>Separate parts</b>				
Designation	Description	Reference	Weight kg lb	
<b>Mounting kit Sold in lots of 10</b>	For mounting Functional Safety modules on a plate or panel	<b>TMAM2</b>	0.065 0.143	

(1) Removable terminal blocks equipped with screw terminals or spring terminals, supplied with the controller.

▲ Available 2nd half of 2014.

### Presentation

Modicon TM3 transmitter and receiver modules can be used to:

- increase from 7 to 14 the number of I/O expansion modules that can be connected to an M2● logic controller
- locate Modicon TM3 expansion modules remotely, up to 5 m (16.404 ft.) away


The transmitter and receiver modules are physically linked by a **VDIP184546●●●** bus expansion cable.

### Mounting


- TM3 bus expansion modules are mounted on a L-shaped symmetrical rail.
- For plate or panel mounting, use the **TMAM2** kit.

### Description

#### TM3XTRA1 transmitter module

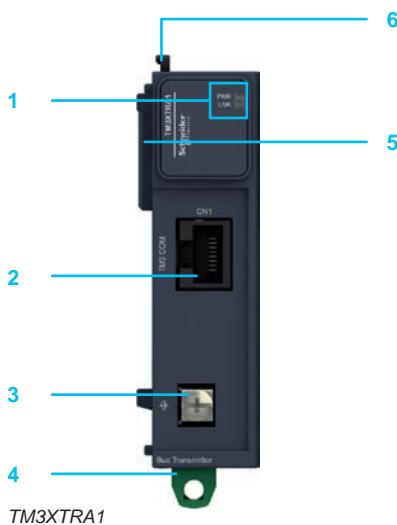

TM3XTRA1

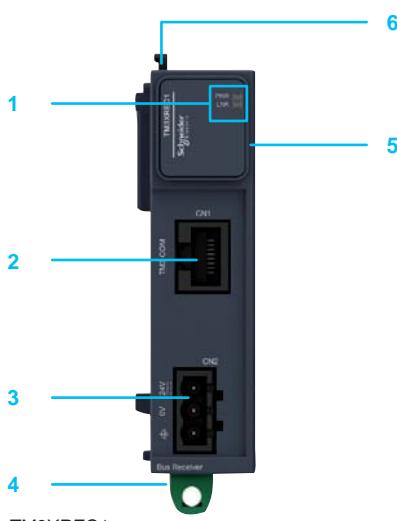

TM3XREC1

#### TM3XREC1 receiver module

- 1 Block with 2 LEDs displaying the communication status and power supply status.
- 2 RJ 45 connector for connecting the **VDIP184546●●●** bus expansion cable.
- 3 Screw terminal block for connecting the power supply.
- 4 L-shaped symmetrical rail locking clip.
- 5 TM3 bus connector providing continuity of the link with the connected module.
- 6 Adjacent module locking latch.

# Expansion modules

Modicon TM3 bus expansion system

Transmitter module and receiver module



TM3XTRA1



TM3XREC1

## References

### Modicon TM3 bus expansion system

Designation	Characteristics	Reference	Weight kg lb
Transmitter module	Data transmission module Power supply: using the TM3 bus	TM3XTRA1	0.065 0.143
Receiver module	Data reception module Power supply: 24 V $\equiv$ (with external power supply)	TM3XREC1 (1)	0.075 0.165

## Cordsets

Designation	Used for	Length	Reference	Weight kg lb
Shielded category 5E TM3 bus expansion cables	TM3 bus expansion by linking transmitter and receiver modules Equipped with an RJ 45 connector at each end	0.5 m 1.64 ft	VDIP184546005	—
		1 m 3.28 ft	VDIP184546010	—
		2 m 6.56 ft	VDIP184546020	—
		3 m 9.84 ft	VDIP184546030	—
		5 m 16.40 ft	VDIP184546050	—

Designation	Description	Unit reference	Weight kg lb
Functional ground cable	Functional ground for the TM3XTRA1 transmitter module	0.12 m 0.39 ft	Cable supplied with the TM3XTRA1 transmitter module

## Spare parts

Designation	Description	Unit reference	Weight kg lb
Mounting kit <small>Sold in lots of 10</small>	For mounting bus expansion modules on a plate or panel	TMAM2	0.065 0.143
Set of terminal blocks for connecting the power supply	8 removable terminal blocks with screw terminals	TMAT2PSET	0.127 0.280

(1) The TM3XREC1 module is supplied with a removable screw terminal block for connecting the power supply.

<b>T</b>	
<b>TM2XMTGB</b>	11
<b>TM3AI2H</b>	11
<b>TM3AI2HG</b>	11
<b>TM3AI4</b>	11
<b>TM3AI4G</b>	11
<b>TM3AI8</b>	11
<b>TM3AI8G</b>	11
<b>TM3AM6</b>	11
<b>TM3AM6G</b>	11
<b>TM3AQ2</b>	11
<b>TM3AQ2G</b>	11
<b>TM3AQ4</b>	11
<b>TM3AQ4G</b>	11
<b>TM3DI8</b>	7
<b>TM3DI8A</b>	7
<b>TM3DI8G</b>	7
<b>TM3DI16</b>	7
<b>TM3DI16G</b>	7
<b>TM3DI16K</b>	7
<b>TM3DI32K</b>	7
<b>TM3DM8R</b>	7
<b>TM3DM8RG</b>	7
<b>TM3DM24R</b>	7
<b>TM3DM24RG</b>	7
<b>TM3DQ8R</b>	7
<b>TM3DQ8RG</b>	7
<b>TM3DQ8T</b>	7
<b>TM3DQ8TG</b>	7
<b>TM3DQ8U</b>	7
<b>TM3DQ8UG</b>	7
<b>TM3DQ16R</b>	7
<b>TM3DQ16RG</b>	7
<b>TM3DQ16T</b>	7
<b>TM3DQ16TG</b>	7
<b>TM3DQ16TK</b>	7
<b>TM3DQ16U</b>	7
<b>TM3DQ16UG</b>	7
<b>TM3DQ16UK</b>	7
<b>TM3DQ32TK</b>	7
<b>TM3DQ32UK</b>	7
<b>TM3SAC5R</b>	17
<b>TM3SAC5RG</b>	17
<b>TM3SAF5R</b>	17
<b>TM3SAF5RG</b>	17
<b>TM3SAFL5R</b>	17
<b>TM3SAFL5RG</b>	17
<b>TM3SAK6R</b>	17
<b>TM3SAK6RG</b>	17
<b>TM3TI4</b>	11
<b>TM3TI4G</b>	11
<b>TM3TI8T</b>	11
<b>TM3TI8TG</b>	11
<b>TM3TM3</b>	11
<b>TM3TM3G</b>	11
<b>TM3XREC1</b>	19
<b>TM3XTRA1</b>	19
<b>TM3XTYS4</b>	13
<b>TM200RSRCEMC</b>	11
<b>TMAM2</b>	7 11 13 17 19
<b>V</b>	
<b>TMAT2MSET</b>	7 11
<b>TMAT2MSETG</b>	7 11
<b>TMAT2PSET</b>	19
<b>VDIP184546005</b>	19
<b>VDIP184546010</b>	19
<b>VDIP184546020</b>	19
<b>VDIP184546030</b>	19
<b>VDIP184546050</b>	19

**Schneider Electric Industries SAS**

Head Office  
35, rue Joseph Monier  
F-92500 Rueil-Malmaison  
France

[www.schneider-electric.com](http://www.schneider-electric.com)

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric  
Photos: Schneider Electric

DIA3ED2140109EN